

SILWOOD

Acrylic sealant in water dispersion for wooden floors



WHERE TO USE

Sealing perimeter joints in wooden floors and joints between different types of floors when there is no joint trim.

TECHNICAL CHARACTERISTICS

Silwood is a solvent-free acrylic sealant in water dispersion for wooden and laminated floors. It is available in a number of colours, which are very similar to the various types of wood most commonly used. It is characterised by good flexibility, excellent bond strength and excellent filling capacity. Once dry, **Silwood** may be sanded down and painted over.

RECOMMENDATIONS

- Do not use **Silwood** at temperatures lower than +10°C.
- Do not use for external applications.
- On pre-finished parquet, choose the most suitable colour of **Silwood** available before application.

APPLICATION PROCEDURE

Preparation of the substrate

The surfaces to be sealed must be clean, dry, and free of dust and greasy substances.

Application of the product

Cut the tube at the end of the threaded part. Screw on the nozzle and make a cut at 45° according to the size of the joint. Insert the tube into the extrusion gun.

In the case of painted or pre-finished parquet or on other types of floor, protect the joint area using masking tape, which must then be removed immediately after applying **Silwood**.



Protective preparation of the sealing of the joint



Filling the joint



Finishing off the surface




Removing the protective paper tape



Protective preparation of the sealing of the joint



Filling the joint

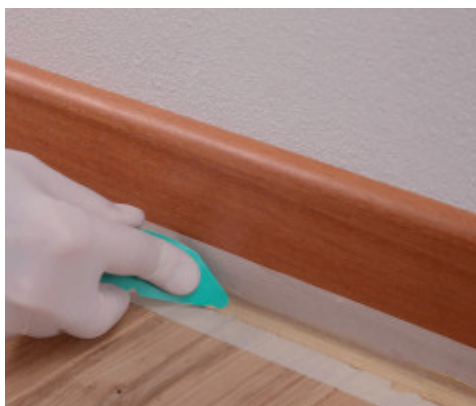

Finishing off the surface



Removing the protective paper tape

CLEANING

Traces of **Silwood** must be removed from painted and pre-finished floors while still fresh with water.

CONSUMPTION

According to the size of the joint to be filled, calculating that its density is 1.75 g/cm³.

PACKAGING

310 ml cartridges.

STORAGE

24 months in its original packaging in a dry area.

SAFETY INSTRUCTIONS FOR PREPARATION AND APPLICATION

Silwood is not considered as dangerous according to the current regulation regarding the classification of mixtures. It is however recommended to use gloves, eyes protection and to take the usual precautions for handling chemicals. For further and complete information about the safe use of our product please refer to the latest version of our Material Safety Data Sheet.

PRODUCT FOR PROFESSIONAL USE.

TECHNICAL DATA (typical values)	
PRODUCT IDENTITY	
Consistency:	paste
Colour:	various
Density (g/cm ³):	1.75
Dry solids content (%):	86
Brookfield viscosity (mPa·s):	700,000
EMICODE:	EC1 - very low emission
APPLICATION DATA (at +23°C and 50% R.H.)	
Application temperature range:	from +5°C to +35°C
Open time:	10-20 minutes
Sanding time:	after 18-24 hours. After sanding, the product may be painted over

P0 White



P1 Oak



P2 Teak



P3 Doussié



P4 Wengè



P5 Walnut



P6 Faded beech



P7 Birch - Maple



P8 Cherry



P9 Iroko



P10 112 Grey



WARNING

Although the technical details and recommendations contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application; for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application. In every case, the user alone is fully responsible for any consequences deriving from the use of the product.

Please refer to the current version of the Technical Data Sheet, available from our website www.mapei.com

4601-9-2015-gb

Any reproduction of texts, photos and illustrations published here is prohibited and subject to prosecution

